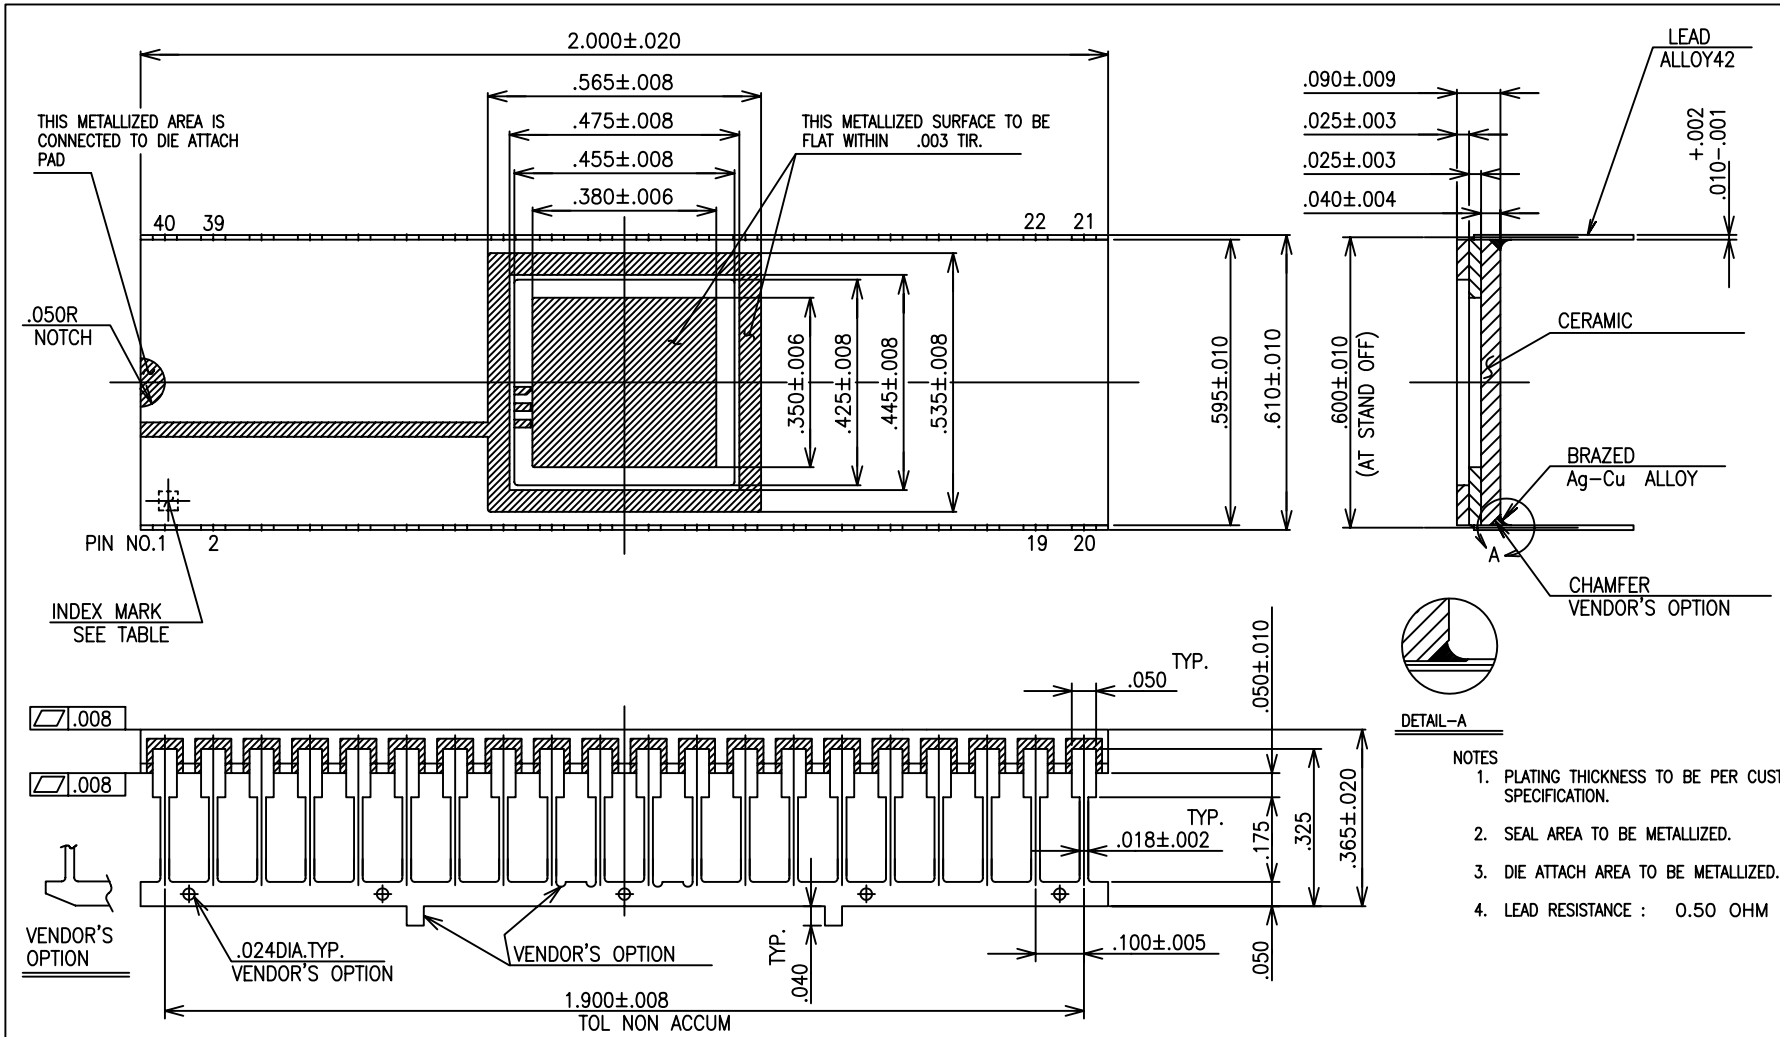

NOTES

1. PLATING THICKNESS TO BE PER CUSTOMER'S SPECIFICATION.
2. SEAL AREA TO BE METALLIZED.
3. DIE ATTACH AREA TO BE METALLIZED.
4. LEAD RESISTANCE : 0.50 OHM MAX.

MODIFICATION							NAME			DRAWN	CHECKED	APPROVED	DATE
							40 LEAD SIDE BRAZED PACKAGE		S OTHERWISE SPECIFIED	M.K	K.		OCT.23.'80
							SCALE 4/1	MATERIA	±.005 THIRD ANGLE PROJECTION				
	B	=RTED CAD DATA)	AUG.28.'93	H.SH	S.F T.C	T.A				DRAWING NO.			SHEET 1/2
		CHANGED	DATE	DRAWN	CHECKED	APPROVED							