


STRANDED TIN COPPER HOOK UP WIRE - INSULATED

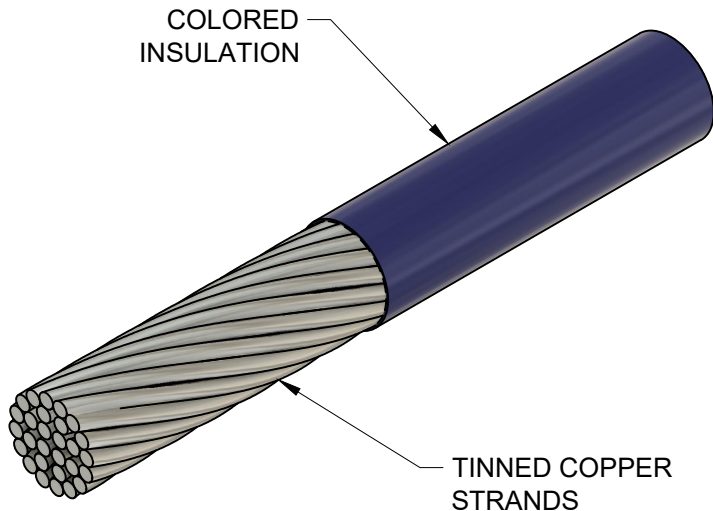


ORDER NUMBER TABLE							
AWG	Ø DIA	COLOR	Strands	5 FT	100 FT	1000 FT	5000 FT
#20	0.032"	BLACK	10/30	108020	108120	108520	108920
#22	0.025"	RED	7/30	108022	108122	108522	108922
#24	0.020"	YELLOW	7/32	108204	108124	108524	108924
#26	0.016"	BLUE	7/34	108026	108126	108526	108296


EXAMPLE HOW TO ORDER:
PART NUMBER 108020 = 5 FT BLACK AWG#20

NOTES: (UNLESS OTHERWIRE SPECIFIED)

1. DIMENSION. INCH AND FEET
2. CONDUCTOR: TINNED COPPER (RoHS COMPLIANT)
3. VOLTAGE 300 V
4. UL007 HOOK UP WIRE
5. INSULATION: $\frac{1}{64}$ " (0.015") PVC (POLYVINYL CHLORIDE)
6. FLAME TEST: VW-1 VERTICAL FLAME
7. RESISTANT TO: MOISTURE, OIL, SOLVENTS AND FUNGUS
8. TEMPERATURE: -40°C TO +80°C (-40°F TO +176°F)

APPROVAL	DATE					
DRAWN Willy Pegues	7/7/2023					
ENG						
MFG						
QA						
CUST		TITLE	WIRE - TINNED COPPER 108XXX SERIES INSULATED			
REVISED Jake Dietrich	7/11/2023	SCALE	SIZE	DWG NO	REV	
THIRD ANGLE PROJECTION		4:1	A	108000	A	
DO NOT SCALE				SHEET 1 OF 2		

WIRE COLOR CODE

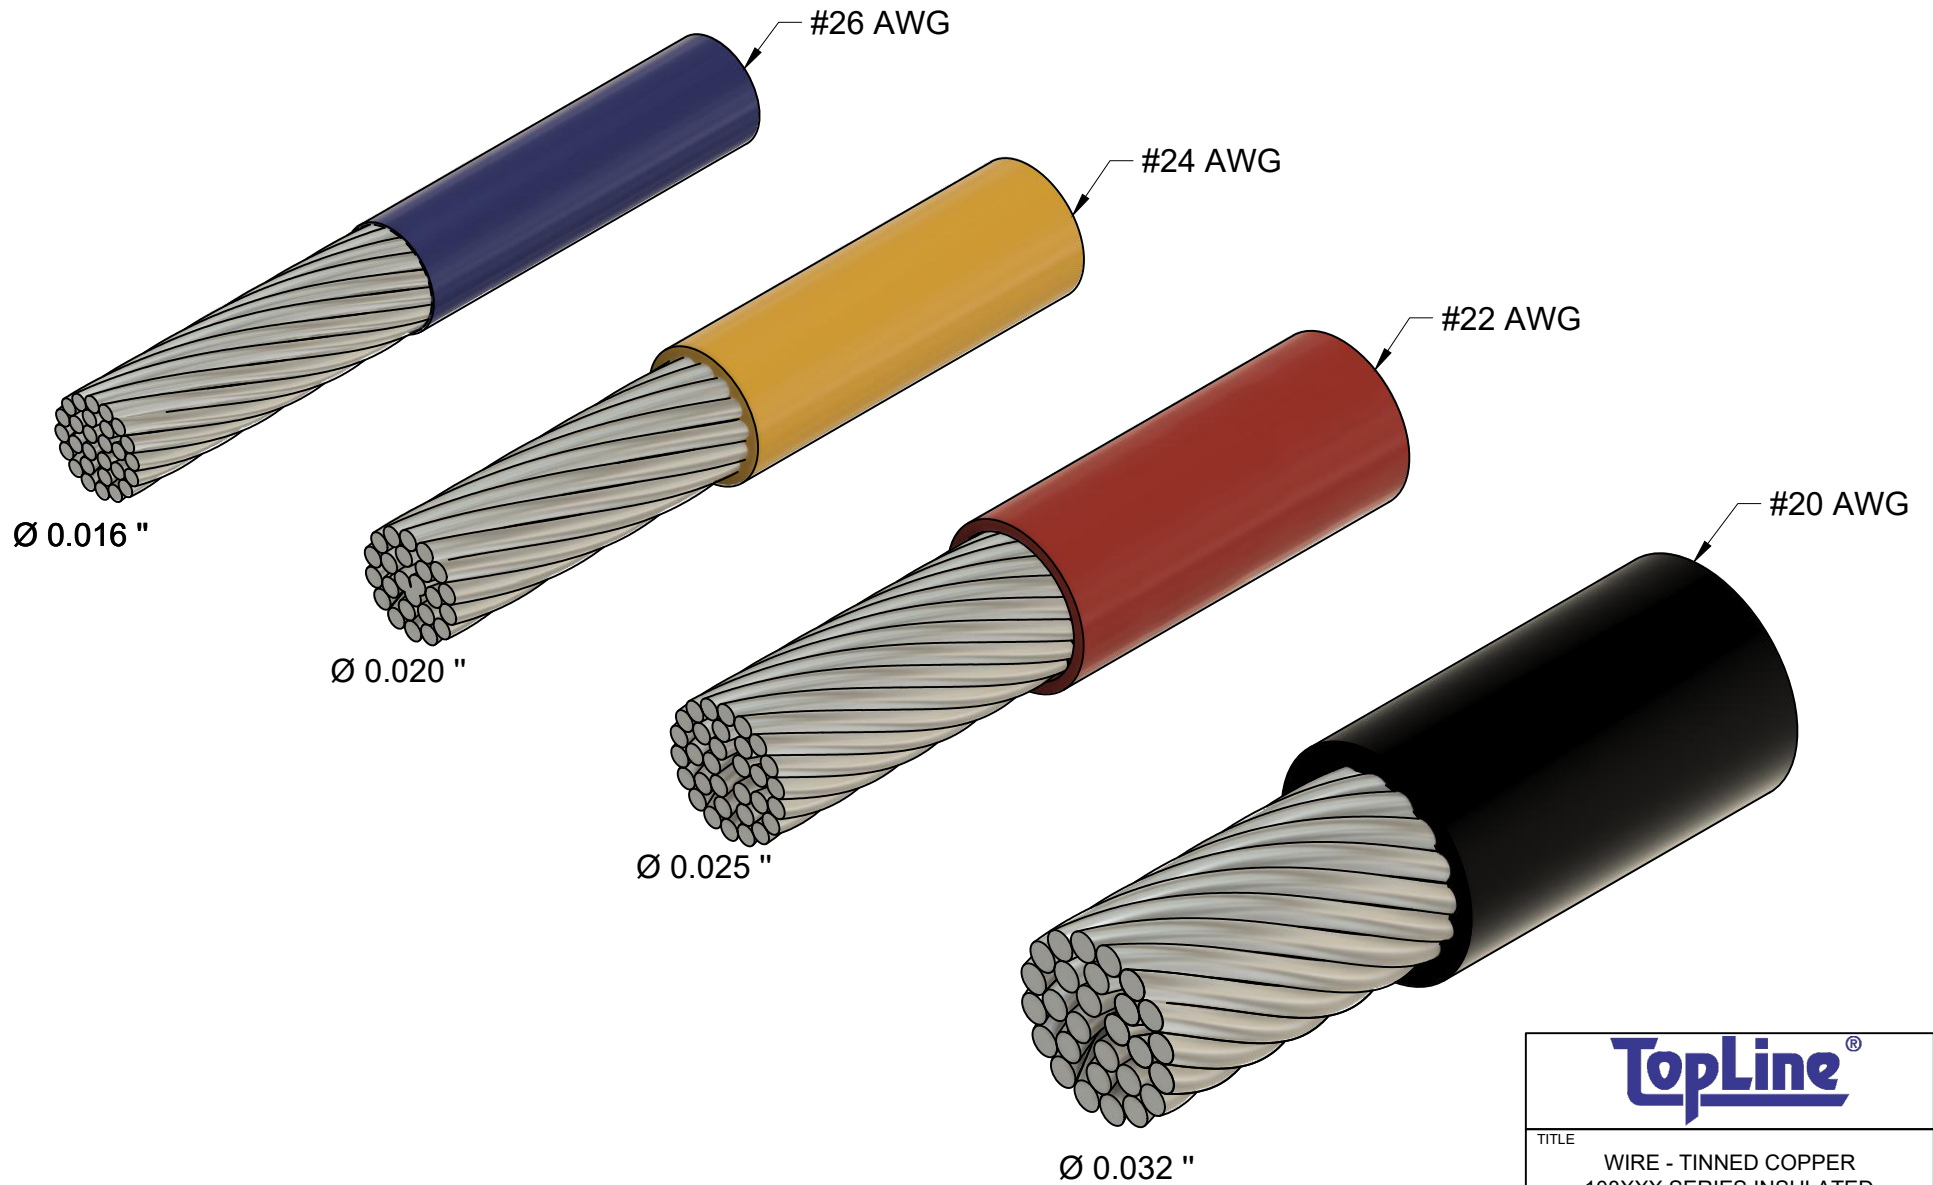

TopLine [®]			
TITLE WIRE - TINNED COPPER 108XXX SERIES INSULATED			
SCALE 4:1	SIZE A	DWG NO 108000	REV A
DO NOT SCALE			SHEET 2 OF 2