



# PANASERT TYPE

- 1/4W (0.25W) Resistors

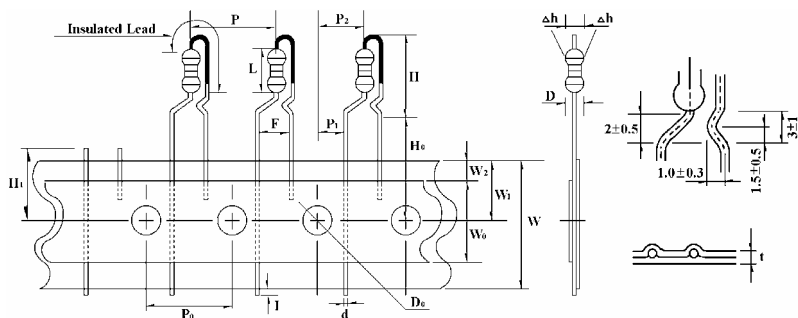

Items	Symbol	Dimension	Items	Symbol	Dimension
Body diameter	D	2.5 Max.	Tape width	W	18 ± 1
Body length	L	6.8 Max.	Hold down tape width	W <sub>0</sub>	12.5 Min.
Body height	H	12 Max.	Hole position	W <sub>1</sub>	9 ± 0.5
Lead-wire diameter	d	0.54 ± 0.05	Hold down tape position	W <sub>2</sub>	3.0 Max.
Pitch of component	P	12.7 ± 1 Lead	wire clinch height	H <sub>0</sub>	16.5 Max.
Feed hole pitch	P <sub>0</sub>	12.7 ± 0.3	Lead wire protrusion	l	1.0 Max.
Hole center to lead	P <sub>1</sub>	3.85 ± 0.7	Feed hole diameter	D <sub>0</sub>	4 ± 0.3
Hole center to body	P <sub>2</sub>	6.35 ± 1.3	Total tape thickness	t	0.5 ± 0.2
Lead to lead distance	F	5 ± 1	Length of clipped lead	H <sub>1</sub>	11 Max.
Component alignment	Δh	0 ± 1	Length of lead cut	H <sub>1</sub> - W <sub>1</sub>	2 ± 0.5
Remark: P <sub>0</sub> cumulative pitch error 1 mm / 20 pitch.					