


SECTION A-A

- Notes: (Unless Otherwise Specified).
- 1) ALL DIMENSIONS ARE IN MM.
 - 2) SOLDER BALL ALLOY: SEE PART NUMBER TABLE.
 - 3) BALL DIAMETER (BEFORE REFLOW): 0.30mm.
 - 4) SOLDER MASK DEFINED PAD OPENING: 0.25mm [10 MIL].
 - 5) PAD Cu DIAMETER: 0.355mm [14 MIL].
 - 6) SUBSTRATE MATERIAL: FR4 (ALTERNATE BT).
 - 7) DUMMY DIE IS OPTIONAL.
 - 8) DAISY CHAIN PATTERN (SEE PAGE 2).
 - 9) MSL-3 RECOMMEND BAKING 24 HOURS @ 125C TO REMOVE MOISTURE PRIOR TO SOLDERING TO PC BOARD.



PART NUMBER TABLE				
PART NUMBER	BALL ALLOY	Pb-FREE	RoHS	Si DIE
BGA625T.5C-DC259	Sn96.5/Ag3.0/Cu0.5	YES	YES	NO
BGA625T.5C-DC259D	Sn96.5/Ag3.0/Cu0.5	YES	YES	YES
BGA625T.5-DC259	Sn63/Pb37	NO	NO	NO
BGA625T.5-DC259D	Sn63/Pb37	NO	NO	YES

TOLERANCE UNLESS NOTED		APPROVALS		DATE									
X.XX	+/- 0.01	DRAWN M.HART		10/4/2011						TITLE BGA625T.5-DC259 DAISY CHAIN DUMMY			
X.XXX	+/- 0.005	ENG				SCALE 6.5:1		SIZE A					
X.XXXX	+/- 0.0005	MFG								DO NOT SCALE DRAWING			
ANGLES +/- 0.5°		QA				SHEET 1 OF 2							
ALL DIMENSIONS IN		CUST								REMOVED			
□ INCHES □ MILLIMETERS		REVISED				REMOVED							
THIRD ANGLE PROJECTION										REMOVED			
						REMOVED							


BALL VIEW

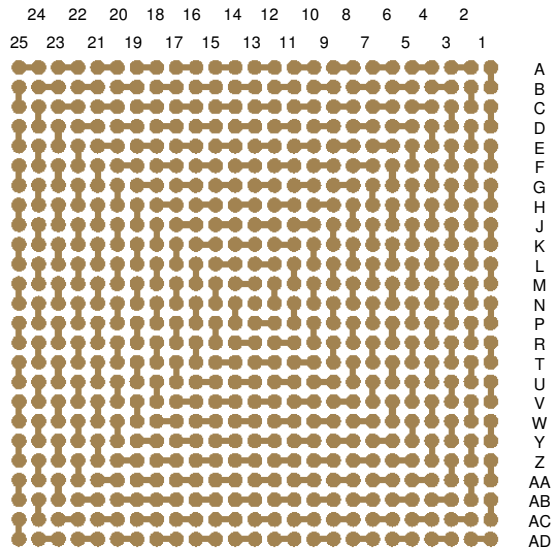

BOTTOM SIDE (TOP X-RAY VIEW)

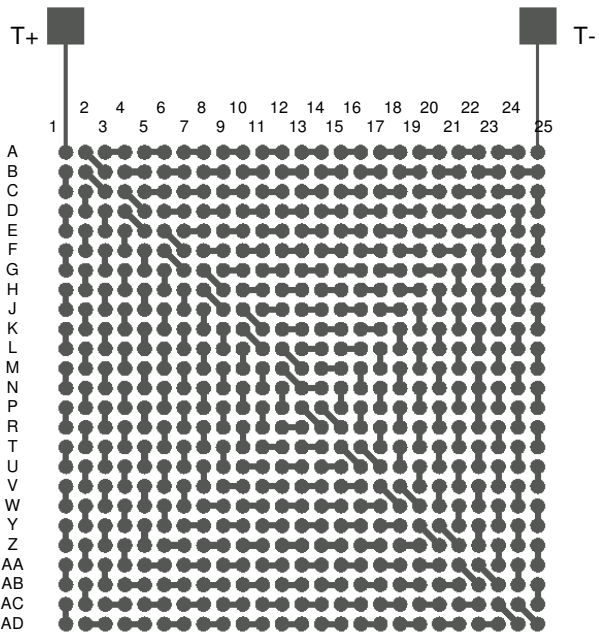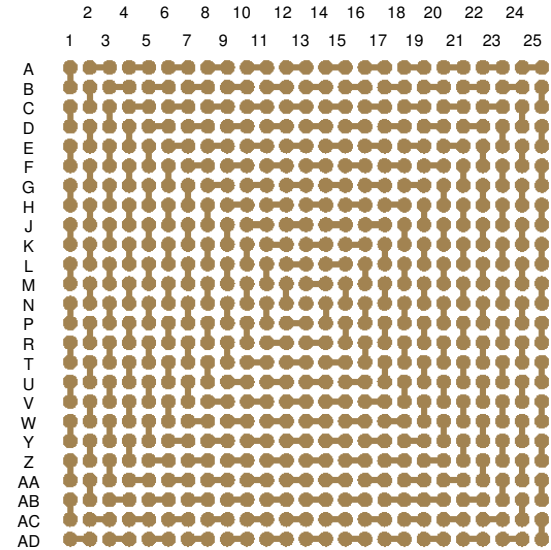

TEST VEHICLE BOARD

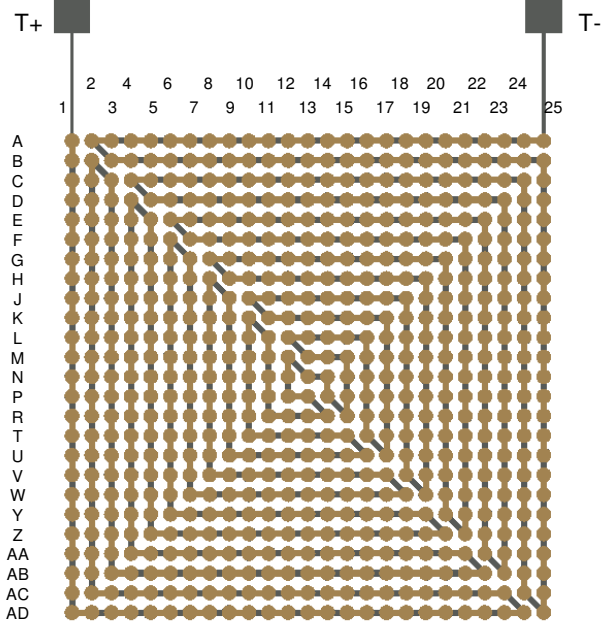

AFTER MOUNTING

Notes:

- 1) PCB BOARD DIMENSIONS ARE PRESENTED ONLY AS A GUIDELINE. DESIGNERS SHOULD USE THEIR OWN EXPERIENCE WHEN DESIGNING PCB.
- 2) PCB Cu BALL PAD DIAMETER 0.355mm [14 MIL].
- 3) PCB DAISY CHAIN TRACING LINE WIDTH 0.127mm [5 MIL].
- 4) SMD (SOLDER MASK DEFINED) PAD OPENING 0.25mm [10 MIL].

TopLine ®			
TITLE BGA625T.5-DC259 DAISY CHAIN DUMMY			
SCALE 6.5:1	SIZE A	DRAWING NO. 552590	REV A
DO NOT SCALE DRAWING		SHEET 2 OF 2	